

Shelfology
Certified Rad™_

Designed, Engineered
& Hand-Finished In The
U.S. Of Awesome_

→ Patent
Pending
✓ Design.

⚡ Lightning
Fast Lead
Times.

Russel Wall Ladder

Install Guide





Installation
Difficulty
Rating (1-10)

4

Table of Contents	Page
Installation Steps	004
Warnings	006
Rad Tips	007

Required
Tools



Drill




1/8" Diameter
Drill Bit


Optional
Tools



Measuring
Tape




Pencil



Level




Low-tack
Tape

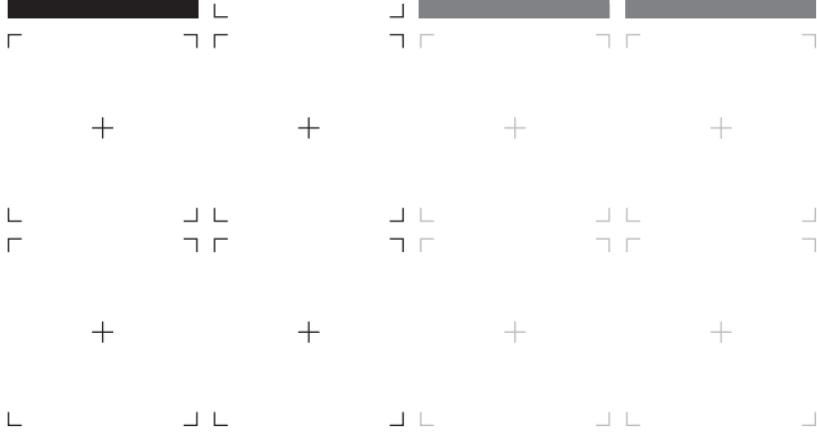

Russel brings your kid's playroom to the next level with monkey bars literally anywhere. Cover your wall or ceiling with 30+ color choices of sheer fun. Monkeys not included. Designed, Engineered & Hand-Finished In The U.S. Of Awesome.

What's In The Box




What You'll Need





Installation Steps


001



*Before installation can begin, the install location must be professionally inspected and prepared with structural support. **User safety is top priority. Review all warnings on page 6 before continuing!***

Russel's simple design requires the use of external studs or supports. You must ensure these supports are correctly mounted to the studs or joists behind your wall or ceiling before continuing with this install.


002



Once the structural support described in Step 1 has been established, hold the handle in desired location and use a bubble level to ensure straightness.

See Rad Tip ① on page 7 about aligning multiple monkey bars.


003



Mark the center of each mounting hole location with a pencil.




004



Use a $\frac{1}{16}$ " drill bit to create a pilot hole at least $1\frac{1}{2}$ " deep in the center of the mounting location before installing truss head fasteners.


Failure to properly drill pilot holes may split the stud or blocking, resulting in major structural rework to your wall and monkey bar project.

005



Install a truss head fastener through each mounting hole. Do not fully tighten until each fastener is in place. Once fasteners are installed, fully tighten each, checking for solid engagement between the fastener and the blocking or stud/joist.


006

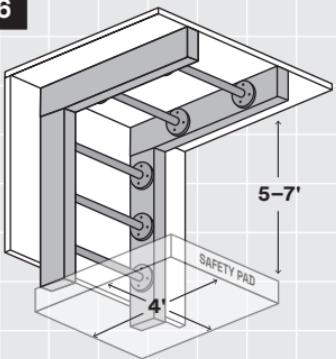

Inspect your install; be sure each fastener is securely installed, and check for level. Repeat all installation steps for additional handles.

It's worth mentioning again: safety is priority one. Read all warnings and rad tips, double check your work before allowing anyone to begin climbing.

007



After you are confident the installation is complete, stand back and revel in your childlike glory! You just gained the envy of third graders everywhere and became jungle gym royalty.

If you need more help, please reach out to a shelf geek today.

hello@shelfology.com
949.244.1083



Whoa, you made it! We are vicariously stoking for you right now. Post your sweet shelfie on Instagram now!



@shelfology
#radshelfie

Need a hand? Speak with a Shelf Geek at 949.244.1083 or hello@shelfology.com today.

How did we do? You'll get an email soon asking for a product review, and we'd be stoked if you oblige. You rock in advance!

Warnings



① **Correct Install Required For Safe Use**

1.1 Follow all safety precautions. Monkey bar hardware must be correctly installed into studs, blocking, or ceiling joists. When properly installed, maximum weight capacity is 200lbs. Failure to follow all safety requirements may result in sagging product, falling objects, or serious injury. We take safety seriously. Please ensure your installation follows all structural requirements. Do not deviate from product specifications or requirements.

② **Anchor Russel Securely**

2.1 Wood or composite sheeting is NOT structural, and is not sufficient as a handle mounting surface. All blocking must be professionally secured to permanent wall studs or ceiling joists. Provided fastener threads must have at least 1 full inch of solid thread engagement into studs or blocking to avoid accidental pull out.

③ **Use Adequate Padding**


3.1 Russel Wall Ladders should never be used without adequate padding beneath them. A fall from any distance can be hazardous or deadly. Pad thickness should correspond to weight, height, and build of the user, and the recommendations of the pad manufacturer should be strictly followed. Every effort to maintain safety should be considered when children are the intended users. Distance to safety pad should never exceed 7 feet.

④ **California Proposition 65 Warning**

4.1 This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Don't eat these monkey bars. If you live outside of California, do whatever you want. For more boring information, visit www.p65warnings.ca.gov.


Rad Tips

① Aligning & Spacing Multiple Monkey Bars



1.1 To align multiple monkey bars, use low tack tape or draw a vertical line along adequate studs or blocking in desired mounting location. Then mark fastener hole locations for desired number of monkey bars. Each monkey bar has two fastener locations, $2\frac{1}{4}$ " apart. $12"-14"$ spacing is recommended between each set of fastener locations.

② Ceiling Height Best Practices



2.1 For children 2-5 years old, the monkey bar rungs should be a height of 5 feet or less above the surface. For children 5-12 years old, the recommended height is 7 feet above the surface.

DESIGNED, ENGINEERED & HAND-FINISHED IN THE U.S. OF AWESOME.

LIGHTNING FAST
LEAD TIMES -

Need a hand? Speak with a
Shelf Geek at 949.244.1083 or
hello@shelfology.com today.

How did we do? You'll get
an email soon asking for a
product review, and we'd be
stoked if you oblige. You rock
in advance!

Call 949.244.1083
Email hello@shelfology.com
Shop www.shelfology.com
Visit 156 N 2nd E Rexburg, ID 83440
Social [@shelfology](https://www.instagram.com/@shelfology)

