
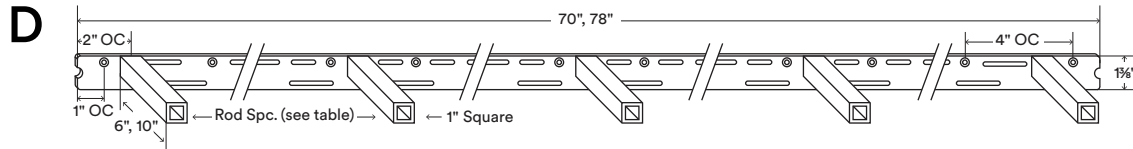
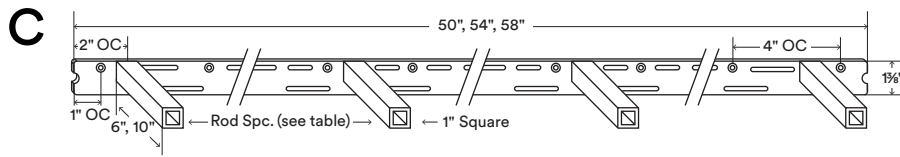
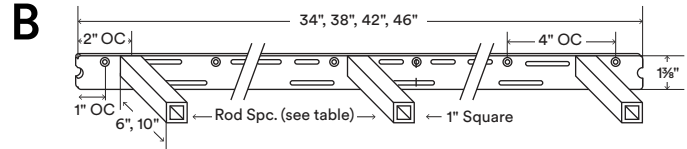


Aksel Hollow Core

Load Capacity (lbs)
250–625*

Shelf Depth Range (in)
7–17

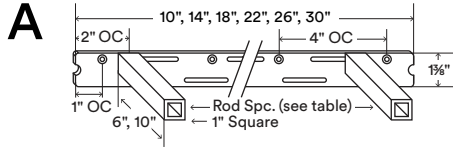

About Aksel Hollow Core

Back bar is 1/4" thick, hot-rolled steel.

Fastener holes are set 1" OC from each end and continue 4" OC down the length of the bracket.

Countersunk fastener holes are 3/8" outside diameter (OD).

Rods are inset 2" on center (OC) from left and right bar end.

Rods are 10" or 6" from backbar face.

Custom rod lengths available upon request.

Supports up to 125 lbs. per hollow rod when correctly mounted.

Manufactured from top-quality American steel made with 70% recycled content.

Designed and produced in beautiful middle-of-nowhere Idaho, with sweat, tears, and Ameri-quality awesomeness.

Shelfology radically recycles all production metal, wood and cardboard waste.

***WARNING:** All brackets must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.

**Drawings are representations only and not to scale.

© Shelfology 2023



Figure	Rod Count	Load	Back bar Length	Rod Spc (OC)	Weight (lbs)	Shelf Length	Shelf Depth	Shelf Thickness
A	2	250 lbs	10"	6"	3.37	12"–16"	7"–17"	3/4"–3"
A	2	250 lbs	14"	10"	3.79	16"–20"	7"–17"	3/4"–3"
A	2	250 lbs	18"	14"	4.21	20"–24"	7"–17"	3/4"–3"
A	2	250 lbs	22"	18"	4.64	24"–28"	7"–17"	3/4"–3"
A	2	250 lbs	26"	22"	5.06	28"–32"	7"–17"	3/4"–3"
A	2	250 lbs	30"	26"	5.48	32"–36"	7"–17"	3/4"–3"
B	3	375 lbs	34"	15"	7.1	36"–40"	7"–17"	3/4"–3"
B	3	375 lbs	38"	17"	7.52	40"–44"	7"–17"	3/4"–3"
B	3	375 lbs	42"	19"	7.94	44"–48"	7"–17"	3/4"–3"
B	3	375 lbs	46"	21"	8.36	48"–52"	7"–17"	3/4"–3"
C	4	500 lbs	50"	15"	9.91	52"–56"	7"–17"	3/4"–3"
C	4	500 lbs	54"	16"	10.33	56"–60"	7"–17"	3/4"–3"
C	4	500 lbs	58"	18"	10.75	60"–72"	7"–17"	3/4"–3"
D	5	625 lbs	70"	16 1/2"	13.21	72"–80"	7"–17"	3/4"–3"
D	5	625 lbs	78"	18 1/2"	14.05	80"–96"	7"–17"	3/4"–3"

