


# Aksel Hollow Core

Load Capacity (lbs)  
180–450\*

Shelf Depth Range (in)  
7–14

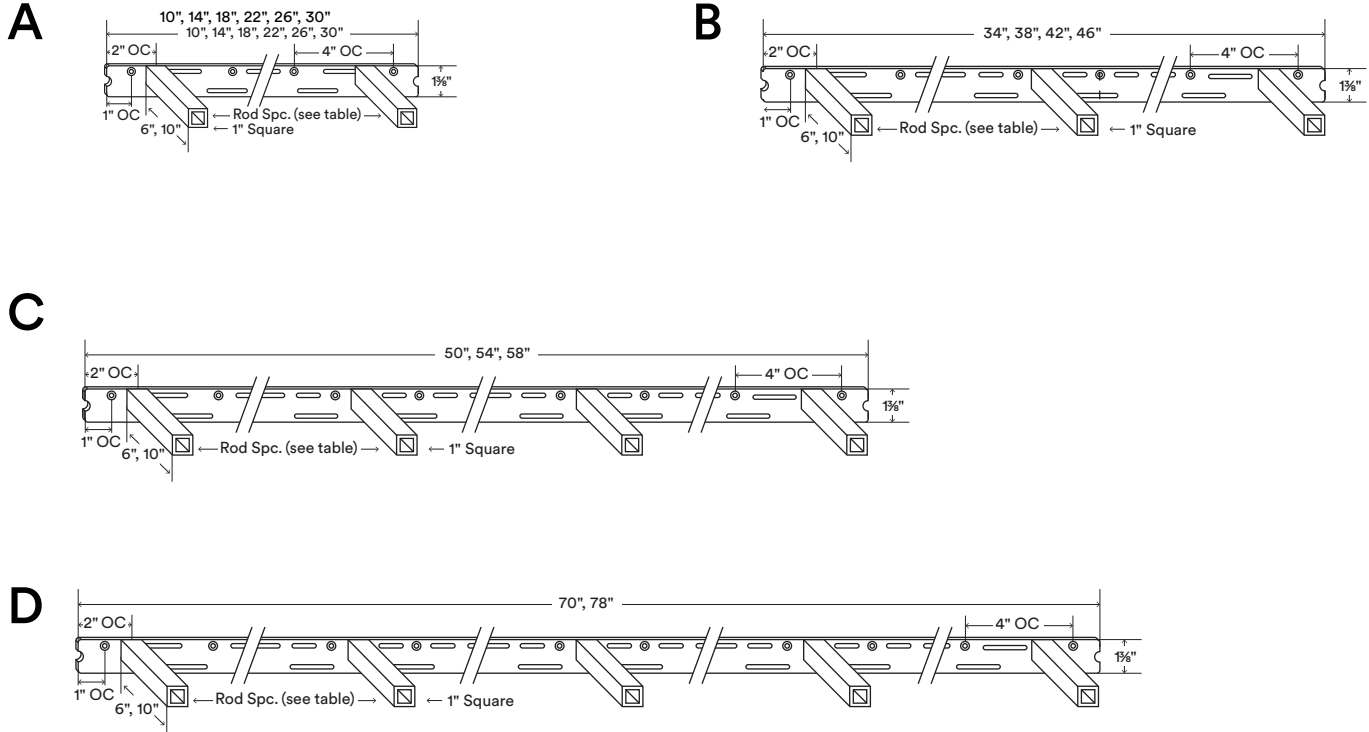

## About Aksel Hollow Core

Back bar is 1/4" thick, hot-rolled steel.

Fastener holes are set 1" OC from each end and continue 4" OC down the length of the bracket.

Countersunk fastener holes are 3/16" outside diameter (OD).

Rods are inset 2" on center (OC) from left and right bar end.

Rods are 6" from backbar face.

Custom rod lengths available upon request.

Supports up to 90 lbs. per hollow rod when correctly mounted\*

Manufactured from top-quality American steel made with 70% recycled content.

Designed & engineered in the U.S. of Awesome.

Shelfology radically recycles all production metal, wood and cardboard waste

**\*WARNING:** All brackets must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.

\*\*Drawings are representations only and not to scale.

© Shelfology 2025

Figure	Rod Count	Load	Back bar Length	Rod Spc (OC)	Weight (lbs)	Shelf Length	Shelf Depth	Shelf Thickness
A	2	180 lbs	10"	6"	3.37	12"–16"	7"–14"	3/4"–3"
A	2	180 lbs	14"	10"	3.79	16"–20"	7"–14"	3/4"–3"
A	2	180 lbs	18"	14"	4.21	20"–24"	7"–14"	3/4"–3"
A	2	180 lbs	22"	18"	4.64	24"–28"	7"–14"	3/4"–3"
A	2	180 lbs	26"	22"	5.06	28"–32"	7"–14"	3/4"–3"
A	2	180 lbs	30"	26"	5.48	32"–36"	7"–14"	3/4"–3"
B	3	270 lbs	34"	15"	7.1	36"–40"	7"–14"	3/4"–3"
B	3	270 lbs	38"	17"	7.52	40"–44"	7"–14"	3/4"–3"
B	3	270 lbs	42"	19"	7.94	44"–48"	7"–14"	3/4"–3"
B	3	270 lbs	46"	21"	8.36	48"–52"	7"–14"	3/4"–3"
C	4	360 lbs	50"	15"	9.91	52"–56"	7"–14"	3/4"–3"
C	4	360 lbs	54"	16"	10.33	56"–60"	7"–14"	3/4"–3"
C	4	360 lbs	58"	18"	10.75	60"–72"	7"–14"	3/4"–3"
D	5	450 lbs	70"	16 1/2"	13.21	72"–80"	7"–14"	3/4"–3"
D	5	450 lbs	78"	18 1/2"	14.05	80"–96"	7"–14"	3/4"–3"

