


# Aksel Hollow Core HD

Load Capacity (lbs)  
180–450\*

Shelf Depth Range (in)  
7–14

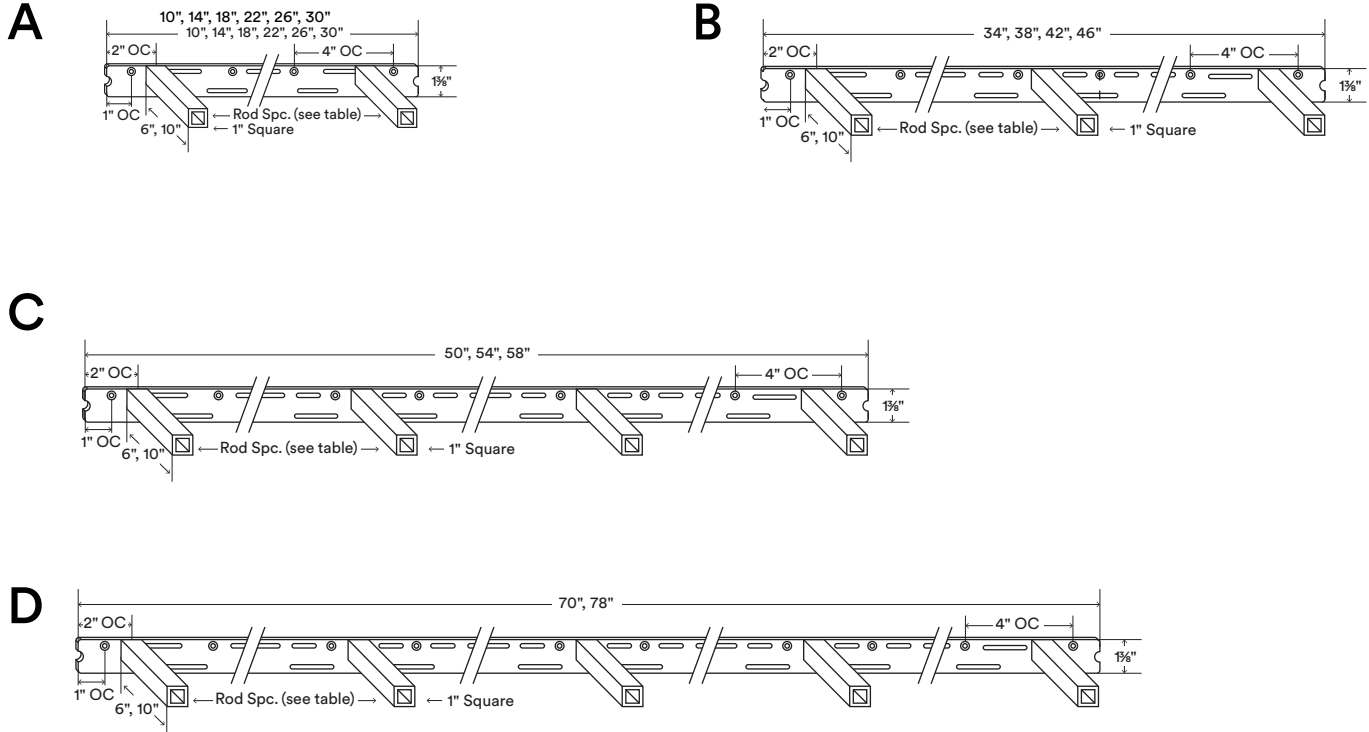

## About Aksel Hollow Core

Back bar is 1/4" thick, hot-rolled steel.

Fastener holes are set 1" OC from each end and continue 4" OC down the length of the bracket.

Countersunk fastener holes are 3/16" outside diameter (OD).

Rods are inset 2" on center (OC) from left and right bar end.

Rods are 6" from backbar face.

Custom rod lengths available upon request.

Supports up to 90 lbs. per hollow rod when correctly mounted\*

Designed & engineered in the U.S. of Awesome.

Shelfology radically recycles all production metal, wood and cardboard waste

**\*WARNING:** All brackets must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.

\*\*Drawings are representations only and not to scale.

Made In Vietnam.

© Shelfology 2025

| Figure | Rod Count | Load    | Back bar Length | Rod Spc (OC) | Weight (lbs) | Shelf Length | Shelf Depth | Shelf Thickness |
|--------|-----------|---------|-----------------|--------------|--------------|--------------|-------------|-----------------|
| A      | 2         | 180 lbs | 10"             | 6"           | 3.37         | 12"–16"      | 7"–14"      | 3/4"–3"         |
| A      | 2         | 180 lbs | 14"             | 10"          | 3.79         | 16"–20"      | 7"–14"      | 3/4"–3"         |
| A      | 2         | 180 lbs | 18"             | 14"          | 4.21         | 20"–24"      | 7"–14"      | 3/4"–3"         |
| A      | 2         | 180 lbs | 22"             | 18"          | 4.64         | 24"–28"      | 7"–14"      | 3/4"–3"         |
| A      | 2         | 180 lbs | 26"             | 22"          | 5.06         | 28"–32"      | 7"–14"      | 3/4"–3"         |
| A      | 2         | 180 lbs | 30"             | 26"          | 5.48         | 32"–36"      | 7"–14"      | 3/4"–3"         |
| B      | 3         | 270 lbs | 34"             | 15"          | 7.1          | 36"–40"      | 7"–14"      | 3/4"–3"         |
| B      | 3         | 270 lbs | 38"             | 17"          | 7.52         | 40"–44"      | 7"–14"      | 3/4"–3"         |
| B      | 3         | 270 lbs | 42"             | 19"          | 7.94         | 44"–48"      | 7"–14"      | 3/4"–3"         |
| B      | 3         | 270 lbs | 46"             | 21"          | 8.36         | 48"–52"      | 7"–14"      | 3/4"–3"         |
| C      | 4         | 360 lbs | 50"             | 15"          | 9.91         | 52"–56"      | 7"–14"      | 3/4"–3"         |
| C      | 4         | 360 lbs | 54"             | 16"          | 10.33        | 56"–60"      | 7"–14"      | 3/4"–3"         |
| C      | 4         | 360 lbs | 58"             | 18"          | 10.75        | 60"–72"      | 7"–14"      | 3/4"–3"         |
| D      | 5         | 450 lbs | 70"             | 16 1/2"      | 13.21        | 72"–80"      | 7"–14"      | 3/4"–3"         |
| D      | 5         | 450 lbs | 78"             | 18 1/2"      | 14.05        | 80"–96"      | 7"–14"      | 3/4"–3"         |

