


# Bender FM 3

Load Capacity (lbs.)  
15–30\*

Shelf Depth (in.)  
6

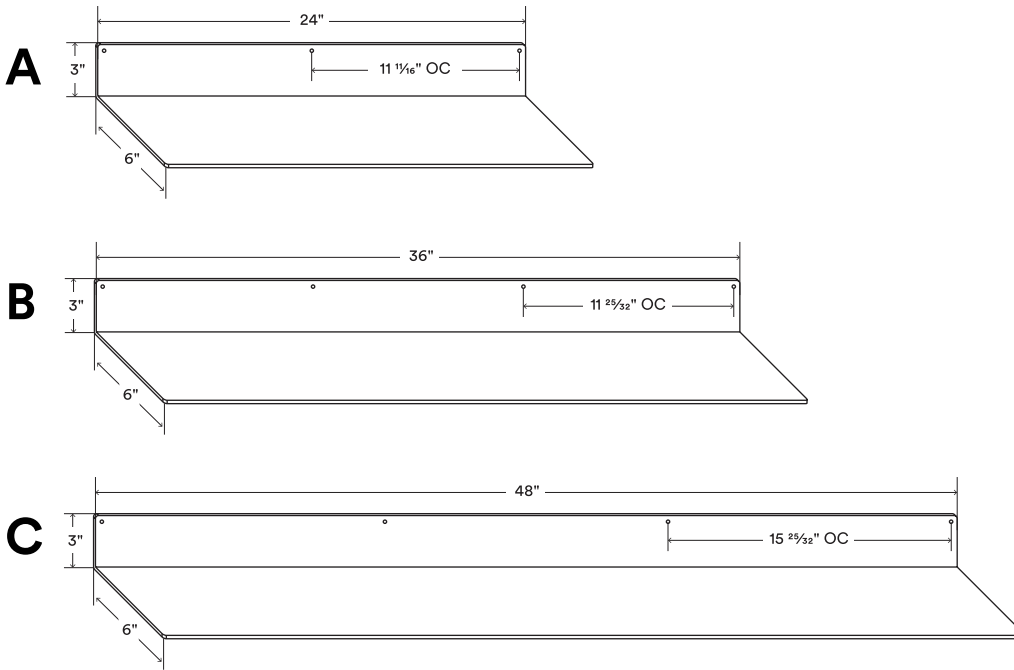

## About Bender FM 3

Shelf constructed with 14 gauge hot-rolled steel.

Screw holes are set  $\frac{5}{16}$ " OC from each end.

Supports 7.5lbs per linear foot.

Custom depths and lengths available upon request.

Manufactured from top-quality American steel made with 70% recycled content.

Designed and produced in beautiful middle-of-nowhere Idaho, with sweat, tears, and Ameri-quality awesomeness.

Shelfology radically recycles all production metal, wood and cardboard waste.

\*  
WARNING: All shelves must be installed properly into studs or with wall anchors. Failure to do so may result in saggy shelves, falling objects, or even injury.

\*\*  
Drawings are representations only and not to scale.

© Shelfology 2023

Figure	Load	Back bar Height	Screw Hole Spacing (OC)	Weight (lbs)
A	15 lbs	3"	$11\frac{1}{16}$ "	4
B	22.5 lbs	3"	$11\frac{25}{32}$ "	$5\frac{3}{4}$
C	30 lbs	3"	$15\frac{25}{32}$ "	$7\frac{1}{2}$