

Shelfology  
Certified Rad™

Designed & Crafted  
By Radically Talented  
Humans Right Here In  
The U.S. Of Awesome\_

➔ Patent  
Pending  
Design.

⚡ Lightning  
Fast Lead  
Times.

# Double Rainbow Install Guide





4

Table of Contents	Page
Installation Steps	004
Warnings	006
Rad Tips	007

## Required Tools



## Level



## Optional Tools

## Stud Finder



**1/4" Diameter  
Drill Bit**



## Pencil



## Measuring Tape




START ↓ ↓

Get ready for the  
Double Rainbow Shelf:  
twice the storage  
space, a bazillion  
times more amazing.  
Designed & Crafted  
By Radically Talented  
Humans Right Here In  
The U.S. Of Awesome.



Double Rainbow Install Guide  
Introduction

## What's In The Box



DESIGNED & CRAFTED BY RADICALLY TALENTED  
HUMANS RIGHT HERE IN THE U.S. OF AWESOME.


LIGHTNING FAST  
LEAD TIMES.

P.003




# Installation Steps

001

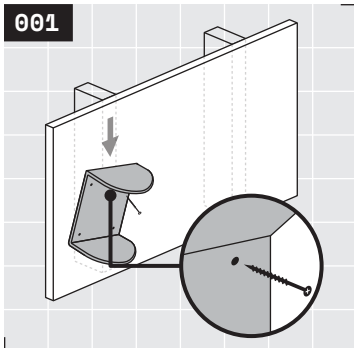


Here we go! Position your shiny new shelf on the wall. Use a drill to fasten one of the the top holes to the wall in the desired location. For masonry installs, see **Rad Tip** ③ on page 7.

002

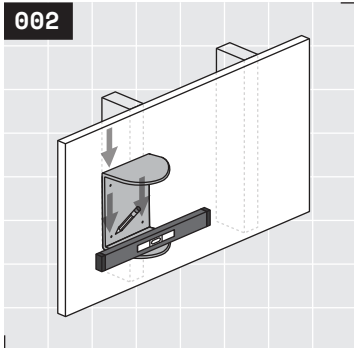

Level your shelf and mark remaining three fastener holes with a pencil. If you have installed blocking behind the full length of your shelf, **skip to step 6**. If you have not installed blocking, **proceed to step 3**. For more information on blocking, see **Rad Tip** ① on page 7.


003

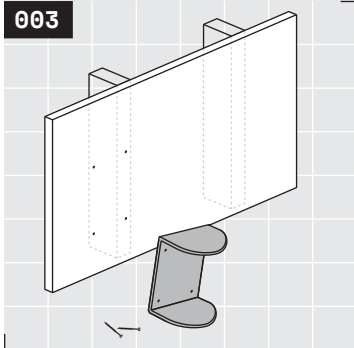

Once every fastener location has been marked, remove your shelf from the wall. Take a swig of your favorite soda or non-alcoholic brew.




004




Predrill drywall in any marked location that does not cross a stud or blocking. Use a 1/4" drill bit to avoid breaking drywall anchors.

005




Install a drywall anchor in each of these pre-drilled locations. If you are using your own anchors, we recommend Toggle brand for best results. Drywall anchors should be installed flush with the drywall surface.

006



Replace your shelf and install all four matching fasteners.

007



Make a final inspection of your shelf. Check for shelf sag, confirm shelf is correctly secured to wall. See **Rad Tip**® on page 7.

Stand back and relax, you did it! Give your cat a celebratory fist bump, if present.





Whoa, you made it! We are vicariously stoking for you right now. Post your sweet shelfie on Instagram now!



@shelfology  
#radshelfie

Need a hand? Speak with a Shelf Geek at 949.244.1083 or hello@shelfology.com today.

How did we do? You'll get an email soon asking for a product review, and we'd be stoked if you oblige. You rock in advance!

## Warnings



### ① Correct Install Required For Safe Use

1.1 Shelves must be correctly installed into studs or wall blocking. Failure to do so may result in sagging shelves, falling objects, or serious injury.

### ② Adhere To The Capacity Rating Of Your Specific Shelf

2.1 Every Shelfology shelf has been engineered for use with specific capacities. Failure to follow our specified capacity ratings may result in sagging shelves, falling objects, or serious injury. Please reference the Double Rainbow Spec Sheet for more information.


### ③ California Proposition 65 Warning

3.1 This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Don't eat this shelf. If you live outside of California, do whatever you want. For more boring information, visit [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).


### ④ Not For Use In Wet Environments

4.1 Powder coated carbon steel does not equal waterproof. If water has direct and constant contact with the shelf, like in a shower or outdoors, it will rust. Shelves installed in these conditions are not covered by our warranty.

### ① Fasten Into All Studs & Blocking The Shelf Crosses



**1.1** Studs are the vertical 2x4 boards that make up the bones of your walls. They provide solid structure for your shelves to attach to.




**1.2** Blocking is typically added later between studs in the wall for additional support to mount shelves to, and is usually made from 2x4 or 2x6 lumber.




**1.3** For a contractor grade install with best substrate strength, install blocking along the length of your shelf.

### ② Using Shims With Your Shelf



**2.1** If your wall is not straight, use shims to ensure your shelf is installed straight across the wall face and square to the wall.


### ③ Masonry Installation



**3.1** Hold shelf in position and mark hole placements. Drill each marked location with a  $\frac{1}{4}$ " diameter masonry drill bit. Drill at least  $2\frac{1}{2}$ " deep to allow for the  $2\frac{1}{2}$ " wall fastener.



**3.2** Using a hammer, tap masonry anchor into hole, flush with wall surface.



**3.3** Hold shelf in position, and install masonry fasteners into anchors.

**Need a hand? Speak with a Shelf Geek at 949.244.1083 or [hello@shelfology.com](mailto:hello@shelfology.com) today.**

**How did we do? You'll get an email soon asking for a product review, and we'd be stoked if you oblige. You rock in advance!**

Call	949.244.1083
Email	<a href="mailto:hello@shelfology.com">hello@shelfology.com</a>
Shop	<a href="http://www.shelfology.com">www.shelfology.com</a>
Visit	156 N 2nd E Rexburg, ID 83440
Social	@shelfology

