

Drake

Load Capacity (lbs)
20–150*

Surface Depth Range (in)
7–18**

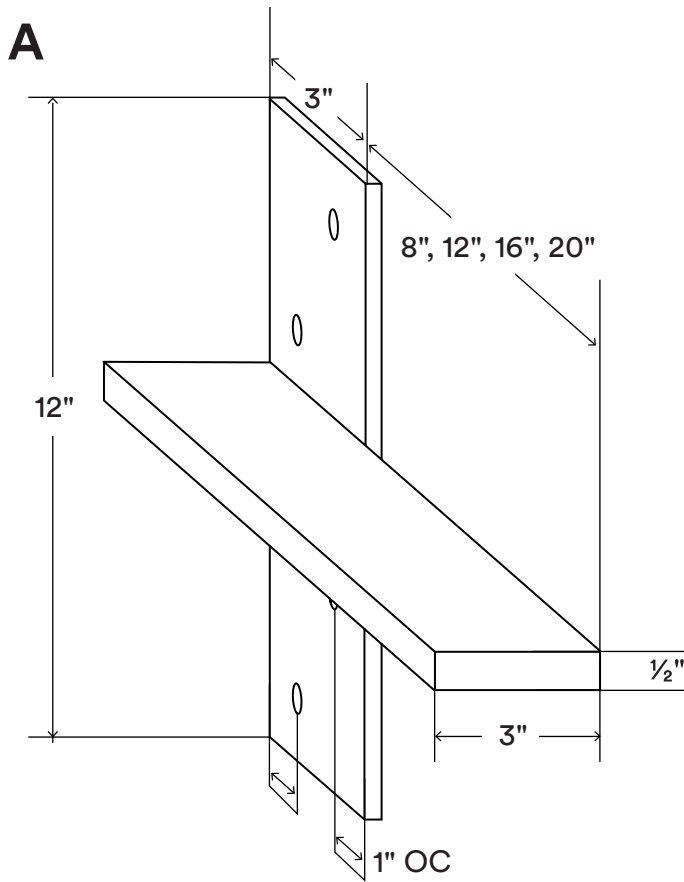


Figure	Bracket Depth	Rod Count	Load	Mounting Plate	Spacing (OC) †	Surface Depth	Surface Thickness
A	8"	1	150 lbs	3" x 12"	16"–32"	7"–11"	1½"–4"
A	12"	1	70 lbs	3" x 12"	16"–32"	12"–15"	1½"–4"
A	16"	1	30 lbs	3" x 12"	16"–32"	16"–18"	1½"–4"
A	20"	1	20 lbs	3" x 12"	16"–32"	19"–24"	1½"–4"

About Drake

Mounting plate is ¼" thick, hot-rolled steel, 3" long x 12" high, with 3" wide x ½" thick support bar.

Screw holes are ¼" outside diameter (OD), ideal for high strength ¼" lag bolts.

Supports surfaces from 9" to 24" deep and 1½" to 4" thick.

†Recommended spacing is 32" on center (OC) for shallower, lighter-duty installations, 16" OC or less for deeper, heavier-duty installations.

Bracket mounts to side of stud. Supports up to 150 lbs per hollow rod when correctly mounted.*

Designed & engineered in the U.S. of Awesome.

Shelfology radically recycles all production metal, wood and cardboard waste

***WARNING:** All brackets must be installed into studs or posts. Failure to do so may result in saggy desks, falling objects, or even injury.

****Drawings** are representations only and not to scale.

© Shelfology 2025

