


Lloyd

Load Capacity (lbs.)
62–585*

Shelf Depth Range (in.)
6–12

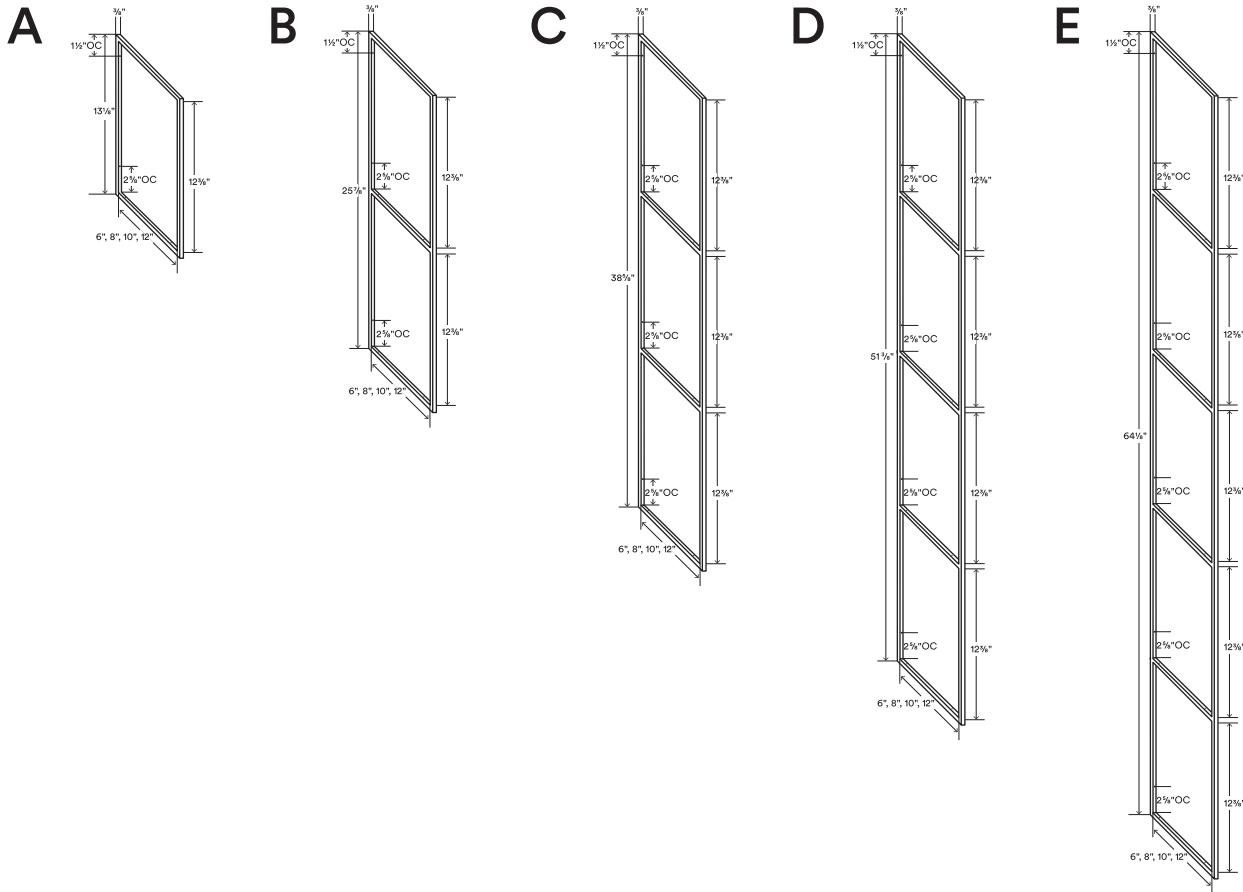

About Lloyd

Bar is 3/8" thick solid hot-rolled steel.

Screw holes are 3/16" outside diameter (OD).

First screw hole is 1 1/2" OC from the top of the bracket.

Each additional back bar screw hole is 2 3/8" OC above each shelf support bar.

Each shelf support bar has two set screw holes to secure the shelf to the bracket.

Manufactured from top-quality American steel made with 70% recycled content.

Designed and produced in beautiful middle-of-nowhere Idaho, with sweat, tears, and Ameri-quality awesomeness.

Shelfology radically recycles all production metal, wood and cardboard waste.

* System weight capacity is determined by the shelf count, shelf depth, and number of brackets used in system.

** Recommended bracket spacing is 48" or less to avoid shelf sag and maximize bracket strength.

WARNING: All brackets must be installed into studs or posts. Failure to do so may result in saggy brackets, falling objects, or even injury.

Drawings are representations only and not to scale.

© Shelfology 2024

Figure	Shelf Count	Shelf Depth	Bracket Load	Vertical Shelf Spacing	Shelf Thickness	Shelf Length**
A	1	6"	260 lbs	NA	3/4"	12"–84"
A	1	8"	145 lbs	NA	3/4"	12"–84"
A	1	10"	91 lbs	NA	3/4"	12"–84"
A	1	12"	62 lbs	NA	3/4"	12"–84"
B	2	6"	328 lbs	12 3/8"	3/4"	12"–84"
B	2	8"	172 lbs	12 3/8"	3/4"	12"–84"
B	2	10"	105 lbs	12 3/8"	3/4"	12"–84"
B	2	12"	71 lbs	12 3/8"	3/4"	12"–84"
C	3	6"	415 lbs	12 3/8"	3/4"	12"–84"
C	3	8"	215 lbs	12 3/8"	3/4"	12"–84"
C	3	10"	129 lbs	12 3/8"	3/4"	12"–84"
C	3	12"	85 lbs	12 3/8"	3/4"	12"–84"
D	4	6"	500 lbs	12 3/8"	3/4"	12"–84"
D	4	8"	254 lbs	12 3/8"	3/4"	12"–84"
D	4	10"	150 lbs	12 3/8"	3/4"	12"–84"
D	4	12"	98 lbs	12 3/8"	3/4"	12"–84"
E	5	6"	585 lbs	12 3/8"	3/4"	12"–84"
E	5	8"	292 lbs	12 3/8"	3/4"	12"–84"
E	5	10"	172 lbs	12 3/8"	3/4"	12"–84"
E	5	12"	112 lbs	12 3/8"	3/4"	12"–84"