


# Roderick


Load Capacity (lbs)  
**110-165**

Shelf Depth Range (in)  
**6-12\***

**A**

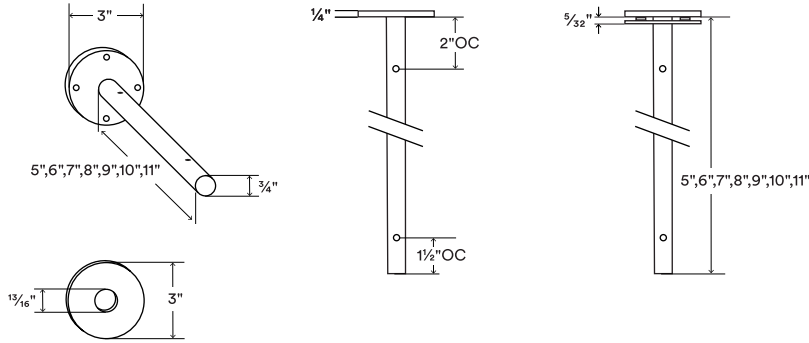

**B**

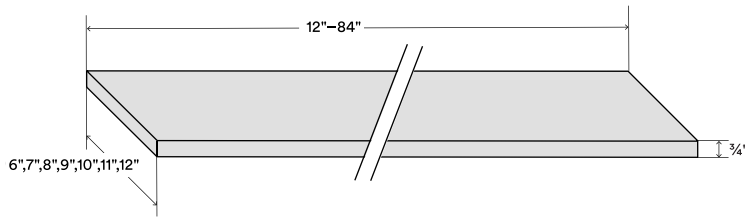

**About Roderick Shelf System**

Bracket rod will measure 1" less than shelf slab depth.

Shelf bracket back plate is 1/2" thick, cover plate 5/32", rod 3/4" diameter. All are solid hot-rolled steel. Mounting screw countersink holes are 5/32" x 3/16". Slab fastener holes are 3/16" through holes.

Ideal placement of bracket is 3 1/2" on center from ends of shelf. Brackets can be placed up to 6" OC from ends of shelf.

Brackets are powder coated with any of our available colors, custom colors welcome.

Shelf is solid hardwood made of alder, ash, cherry, mahogany, maple, walnut, or white oak.

12"-48" long shelf systems include two brackets, 49"-84" include three brackets. Bracket supports up to 55 lbs. per rod when correctly mounted.\*\*

Manufactured from top-quality American steel made with 70% recycled content.

Designed and produced in beautiful middle-of-nowhere Idaho, with sweat, tears, and Ameri-quality awesomeness.

Shelfology radically recycles all production metal, wood and cardboard waste.

\*Measurement does not include depth added by bracket.

\*\***WARNING:** All brackets must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.

\*\*\*Drawings are representations only and not to scale.

© Shelfology 2022

Figure	Load Per Rod	Length	Depth	Thickness	Finish
A	55 lbs	NA	5 1/4"-11 1/4"	NA	Powder coat
B	NA	12"-84"	6"-12"	3/4"	Raw, Painted, Stained, Clear Coat