
Tromso Coat Rack

Load Capacity Per Linear Ft (lbs)

90*

Shelf Depth Range (in)

4-12

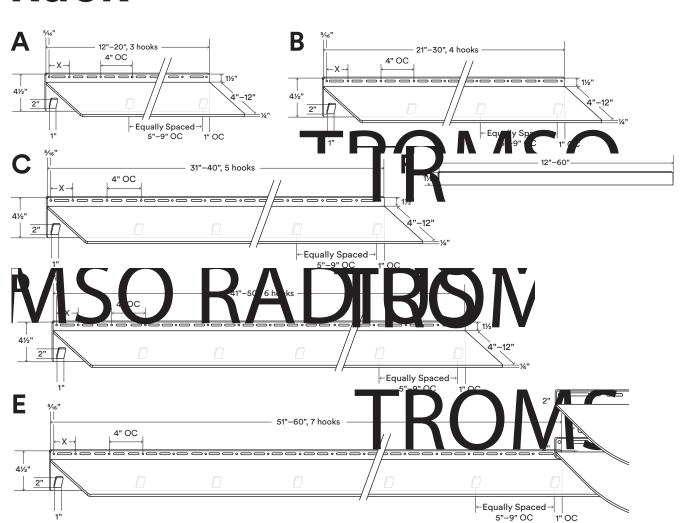

About Tromso Coat Rack	Figure	Length	Number of Hooks	Load Per Linear Foot	Back Bar Height	Shelf Depth	Shelf Thickness	Weight Per Linear Foot
Made from ¼" thick, hot-rolled steel.								
Set-through backbar construction hides welds for a clean look and insane strength.	Α	12"-20"	3	90 lbs	41/2"	4-12"	1/4"	7–14
Cover plate made with 14 gauge steel.	В	21"-30"	4	90 lbs	4½"	4-12"	1/4"	7–14
The first screw holes start 5/16" on center (OC) from each ends. Distance between first and second	С	31"-40"	5	90 lbs	4½"	4-12"	1/4"	7–14
screw hole (X) varies upon shelf length. Holes continue 4" OC down the length of the bracket.	D	41"-50"	6	90 lbs	4½"	4-12"	1/4"	7–14
Countersunk screw holes are 0.19" outside diameter (OD).	E	51"-60"	7	90 lbs	4½"	4-12"	1/4"	7–14
Shelf weight is 0.1 lbs per square inch.	F	12"-60"	NA	NA	11/2"	NA	NA	NA

Manufactured from top-quality American steel made with 70% recycled content.

Designed & crafted by radically talented humans right here in the U.S. of Awesome.

Shelfology radically recycles all production metal, wood, and cardboard waste.

*WARNING: All coat racks must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.

**Drawings are representations only and not to scale.

© Shelfology 2025



