
Tromso FM 3

Capacity Per Linear Ft (lbs)

90-410*

Shelf Depth Range (in) 4-12

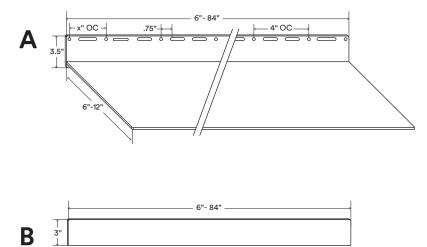

About Tromso FM 3	Figure	Load Per Linear Foot	Shelf Depth	Shelf Length	Back Bar	Shelf Thickness
Back bar is .25" thick, hot-rolled steel.						
Set-through backbar construction hides welds for a clean look and insane strength.	A	410 lbs	4"	6"-84"	3.5" high	.25"
The first screw holes start .3:125" (5%") on center (OC) from each end. Distance between first and second screw hole (X) varies upon shelf length. Holes continue 4" OC down the length of the shelf.	A	370 lbs	5"	6"-84"	3.5" high	.25"
	A	330 lbs	6"	6"-84"	3.5" high	.25"
Countersunk screw holes are .1875" (³/ıɕ") outside diameter (OD).	А	290 lbs	7"	6"-84"	3.5" high	.25"
Shelf weight is 0.1 lbs per square inch.	A	250 lbs	8"	6"-84"	3.5" high	.25"
Cover plate made with 14 gauge steel.						
Manufactured from top-quality American steel made with 70% recycled content.	А	210 lbs	9"	6"-84"	3.5" high	.25"
Designed & crafted by radically talented humans right here in the U.S. of Awesome.	A	170 lbs	10"	6"-84"	3.5" high	.25"
Shelfology radically recycles all production metal, wood and cardboard waste.	A	130 lbs	11"	6"-84"	3.5" high	.25"
*WARNING: All shelves must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.	A	90 lbs	12"	6"-84"	3.5" high	.25"
**Drawings are representations only and not	В	NA	NA	6"-84"	3" high	NA

© Shelfology 2025

to scale.

