

Tromso FM 5

Shelf Depth Range (in)



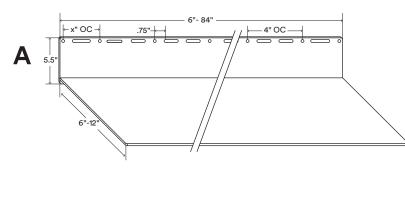



EMAIL HELLO@SHELFOLOGY.COM // ORDER NOW 949.244.1083

2

About Tromso FM 5	Figure	Load Per Linear Foot	Shelf Depth	Shelf Length	Back Bar	Shelf Thickness
Back bar is .25" thick, hot-rolled steel.						
Set-through backbar construction hides welds for a clean look and insane strength.	A	410 lbs	4"	6"-84"	5.5" high	.25"
The first screw holes start .3125" (‰") on center (OC) from each end. Distance between first and second screw hole (X) varies upon shelf length. Holes continue 4" OC down the length of the shelf.	A	370 lbs	5"	6"-84"	5.5" high	.25"
	A	330 lbs	6"	6"-84"	5.5" high	.25"
Countersunk screw holes are .1875" (¾/16") outside diameter (OD).	А	290 lbs	7"	6"-84"	5.5" high	.25"
Shelf weight is 0.1 lbs per square inch.	A	250 lbs	8"	6"-84"	5.5" high	.25"
Cover plate made with 14 gauge steel.						
Manufactured from top-quality American steel made with 70% recycled content.	А	210 lbs	9"	6"-84"	5.5" high	.25"
Designed & crafted by radically talented humans right here in the U.S. of Awesome.	A	170 lbs	10"	6"-84"	5.5" high	.25"
Shelfology radically recycles all production metal, wood and cardboard waste.	A	130 lbs	11"	6"-84"	5.5" high	.25"
*WARNING: All shelves must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.	A	90 lbs	12"	6"-84"	5.5" high	.25"
**Drawings are representations only and not to scale.	В	NA	NA	6"-84"	5" high	NA
© Shelfology 2025						

© Shelfology 2025



Way To Display,, Shelfology.