


# Tromso Recessed

Capacity Per Linear Ft (lbs)  
**90–410\***

Shelf Depth Range (in)  
**4–12**

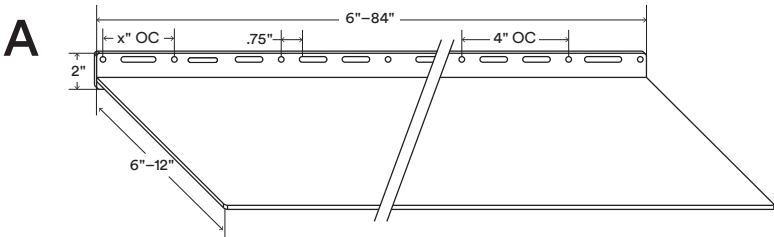

**About Tromso Recessed**

Back bar is .25" thick, hot-rolled steel.

Set-through backbar construction hides welds for a clean look and insane strength.

The first screw holes start .3125" (5/16") on center (OC) from each end. Distance between first and second screw hole (X) varies upon shelf length. Holes continue 4" OC down the length of the shelf.

Countersunk screw holes are .1875" (3/16") outside diameter (OD).

Shelf weight is 0.1 lbs per square inch.

Cover plate made with 14 gauge steel.

Manufactured from top-quality American steel made with 70% recycled content.

Designed & crafted by radically talented humans right here in the U.S. of Awesome.

Shelfology radically recycles all production metal, wood and cardboard waste.

**\*WARNING:** All shelves must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.

**\*\*Drawings** are representations only and not to scale.

© Shelfology 2025



Figure	Load Per Linear Foot	Shelf Depth	Shelf Length	Back Bar	Shelf Thickness
A	410 lbs	4"	6"–84"	2" high	.25"
A	370 lbs	5"	6"–84"	2" high	.25"
A	330 lbs	6"	6"–84"	2" high	.25"
A	290 lbs	7"	6"–84"	2" high	.25"
A	250 lbs	8"	6"–84"	2" high	.25"
A	210 lbs	9"	6"–84"	2" high	.25"
A	170 lbs	10"	6"–84"	2" high	.25"
A	130 lbs	11"	6"–84"	2" high	.25"
A	90 lbs	12"	6"–84"	2" high	.25"