


# Verne

Load Capacity (lbs)  
**62–585\***

Shelf Depth Range (in)  
**6–12**

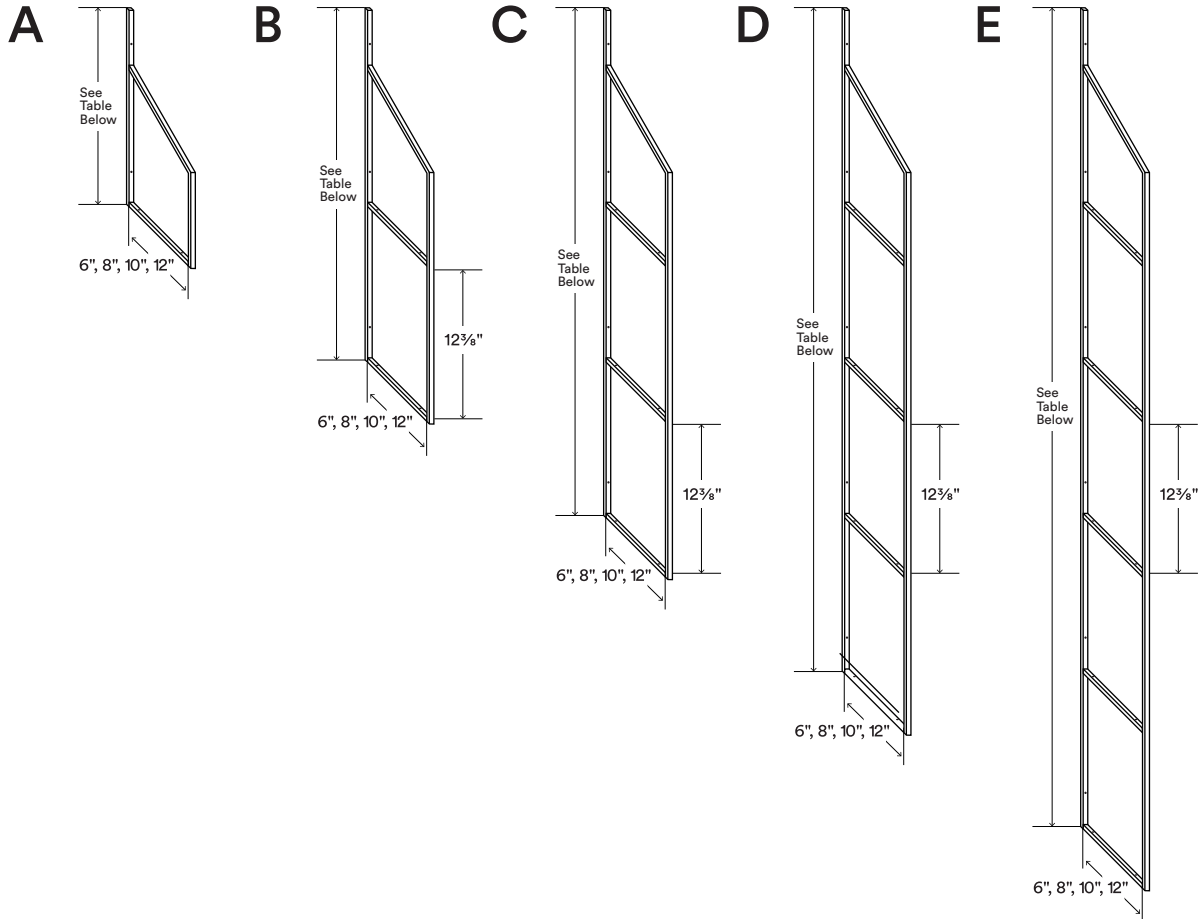

### About Verne

Bar is 3/8" thick solid hot-rolled steel.

Countersunk screwholes are 3/16" outside diameter (OD). First screw hole is 1/2" OC from the top of the back of the bracket. Each additional back bar screw hole is 2 1/2" OC above each shelf support bar.

Each shelf support bar has two set screw holes to secure the shelf to the bracket.

Manufactured from top-quality American steel made with 70% recycled content.

Designed & crafted by radically talented humans right here in the U.S. of Awesome.

Shelfology radically recycles all production metal, wood and cardboard waste.

\* System weight capacity is determined by the shelf count, shelf depth, and number of brackets used in system.

\*\* Recommended bracket spacing is 48" or less to avoid shelf sag and maximize strength.

**WARNING:** All brackets must be installed into studs or posts. Failure to do so may result in saggy brackets, falling objects, or even injury.

Drawings are representations only and not to scale.

© Shelfology 2025



Figure	Shelf Count	Shelf Depth	Load Per Bracket	Bracket Height	Vertical Shelf Spacing	Shelf Length**	Shelf Thickness
A	1	6"	260 lbs	14 1/32"	NA	12"–84"	3/4"
A	1	8"	145 lbs	15 1/2"	NA	12"–84"	3/4"
A	1	10"	91 lbs	16 3/32"	NA	12"–84"	3/4"
A	1	12"	62 lbs	17 19/64"	NA	12"–84"	3/4"
B	2	6"	328 lbs	27 3/32"	12 3/8"	12"–84"	3/4"
B	2	8"	172 lbs	28 1/4"	12 3/8"	12"–84"	3/4"
B	2	10"	105 lbs	29 13/32"	12 3/8"	12"–84"	3/4"
B	2	12"	71 lbs	30 3/16"	12 3/8"	12"–84"	3/4"
C	3	6"	415 lbs	39 27/32"	12 3/8"	12"–84"	3/4"
C	3	8"	215 lbs	41"	12 3/8"	12"–84"	3/4"
C	3	10"	129 lbs	42 3/32"	12 3/8"	12"–84"	3/4"
C	3	12"	85 lbs	43 3/16"	12 3/8"	12"–84"	3/4"
D	4	6"	500 lbs	52 19/32"	12 3/8"	12"–84"	3/4"
D	4	8"	254 lbs	53 3/4"	12 3/8"	12"–84"	3/4"
D	4	10"	150 lbs	54 29/32"	12 3/8"	12"–84"	3/4"
D	4	12"	98 lbs	56 1/16"	12 3/8"	12"–84"	3/4"
E	5	6"	585 lbs	65 1/32"	12 3/8"	12"–84"	3/4"
E	5	8"	292 lbs	66 1/2"	12 3/8"	12"–84"	3/4"
E	5	10"	172 lbs	67 3/32"	12 3/8"	12"–84"	3/4"
E	5	12"	112 lbs	68 13/16"	12 3/8"	12"–84"	3/4"