


# Verne

Load Capacity (lbs)  
**62–585\***

Shelf Depth Range (in)  
**6–12**

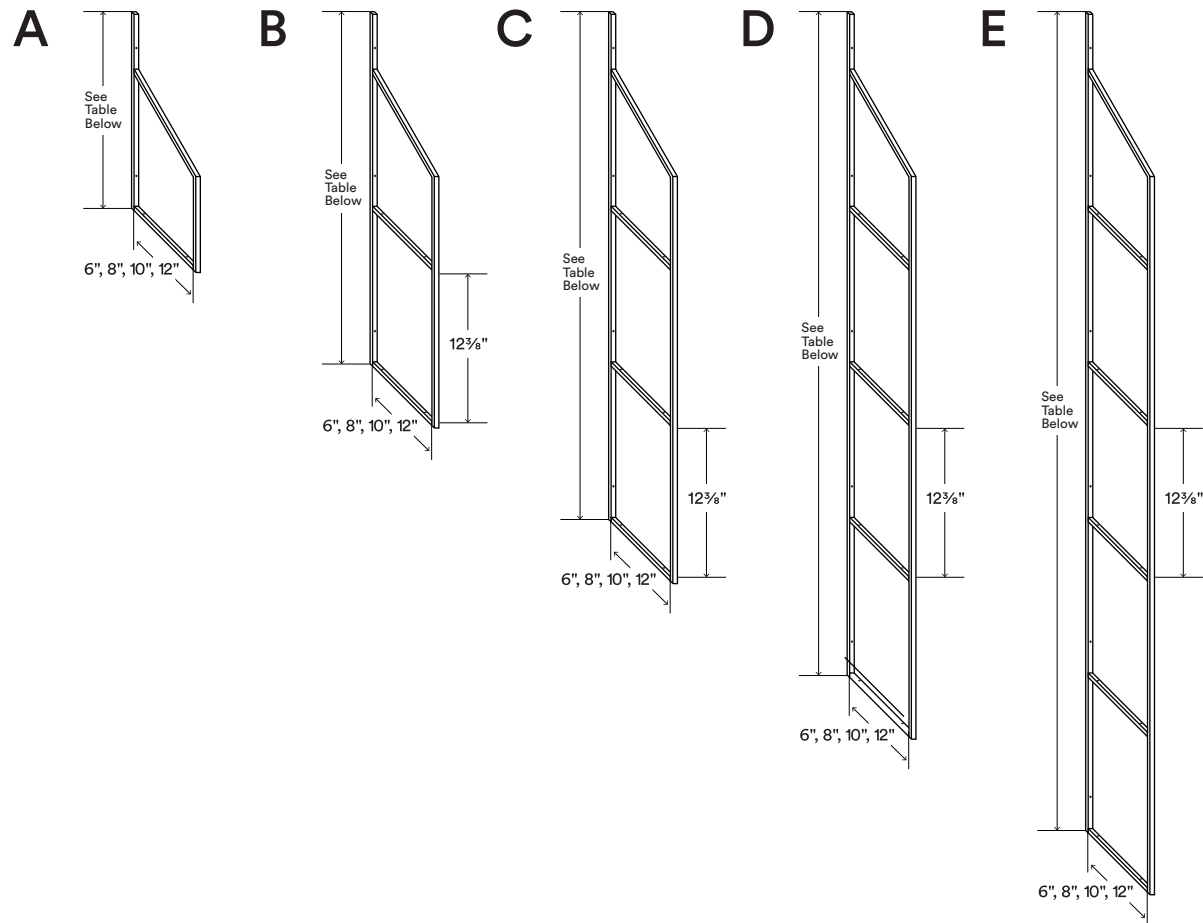

## About Verne

Bar is 3/8" thick solid hot-rolled steel.

Countersunk screwholes are 3/16" outside diameter (OD). First screw hole is 1 1/2" OC from the top of the back of the bracket. Each additional back bar screw hole is 2 1/2" OC above each shelf support bar.

Each shelf support bar has two set screw holes to secure the shelf to the bracket.

Manufactured from top-quality American steel made with 70% recycled content.

Designed & crafted by radically talented humans right here in the U.S. of Awesome.

Shelfology radically recycles all production metal, wood and cardboard waste.

\* System weight capacity is determined by the shelf count, shelf depth, and number of brackets used in system.

\*\* Recommended bracket spacing is 48" or less to avoid shelf sag and maximize strength.

**WARNING:** All brackets must be installed into studs or posts. Failure to do so may result in saggy brackets, falling objects, or even injury.

Drawings are representations only and not to scale.

| Figure | Shelf Count | Shelf Depth | Load Per Bracket | Bracket Height | Vertical Shelf Spacing | Shelf Length** | Shelf Thickness |
|--------|-------------|-------------|------------------|----------------|------------------------|----------------|-----------------|
| A      | 1           | 6"          | 260 lbs          | 14 1/8"        | NA                     | 12"–84"        | 3/4"            |
| A      | 1           | 8"          | 145 lbs          | 15 1/8"        | NA                     | 12"–84"        | 3/4"            |
| A      | 1           | 10"         | 91 lbs           | 16 3/8"        | NA                     | 12"–84"        | 3/4"            |
| A      | 1           | 12"         | 62 lbs           | 17 13/16"      | NA                     | 12"–84"        | 3/4"            |
| B      | 2           | 6"          | 328 lbs          | 27 3/8"        | 12 3/8"                | 12"–84"        | 3/4"            |
| B      | 2           | 8"          | 172 lbs          | 28 1/4"        | 12 3/8"                | 12"–84"        | 3/4"            |
| B      | 2           | 10"         | 105 lbs          | 29 13/32"      | 12 3/8"                | 12"–84"        | 3/4"            |
| B      | 2           | 12"         | 71 lbs           | 30 1/8"        | 12 3/8"                | 12"–84"        | 3/4"            |
| C      | 3           | 6"          | 415 lbs          | 39 27/32"      | 12 3/8"                | 12"–84"        | 3/4"            |
| C      | 3           | 8"          | 215 lbs          | 41"            | 12 3/8"                | 12"–84"        | 3/4"            |
| C      | 3           | 10"         | 129 lbs          | 42 3/8"        | 12 3/8"                | 12"–84"        | 3/4"            |
| C      | 3           | 12"         | 85 lbs           | 43 5/8"        | 12 3/8"                | 12"–84"        | 3/4"            |
| D      | 4           | 6"          | 500 lbs          | 52 9/32"       | 12 3/8"                | 12"–84"        | 3/4"            |
| D      | 4           | 8"          | 254 lbs          | 53 3/4"        | 12 3/8"                | 12"–84"        | 3/4"            |
| D      | 4           | 10"         | 150 lbs          | 54 29/32"      | 12 3/8"                | 12"–84"        | 3/4"            |
| D      | 4           | 12"         | 98 lbs           | 56 1/8"        | 12 3/8"                | 12"–84"        | 3/4"            |
| E      | 5           | 6"          | 585 lbs          | 65 1/32"       | 12 3/8"                | 12"–84"        | 3/4"            |
| E      | 5           | 8"          | 292 lbs          | 66 1/2"        | 12 3/8"                | 12"–84"        | 3/4"            |
| E      | 5           | 10"         | 172 lbs          | 67 1/2"        | 12 3/8"                | 12"–84"        | 3/4"            |
| E      | 5           | 12"         | 112 lbs          | 68 13/16"      | 12 3/8"                | 12"–84"        | 3/4"            |

© Shelfology 2025

