


Aksel Hollow Core MD

Load Capacity (lbs)
170–425*

Shelf Depth Range (in)
7–14

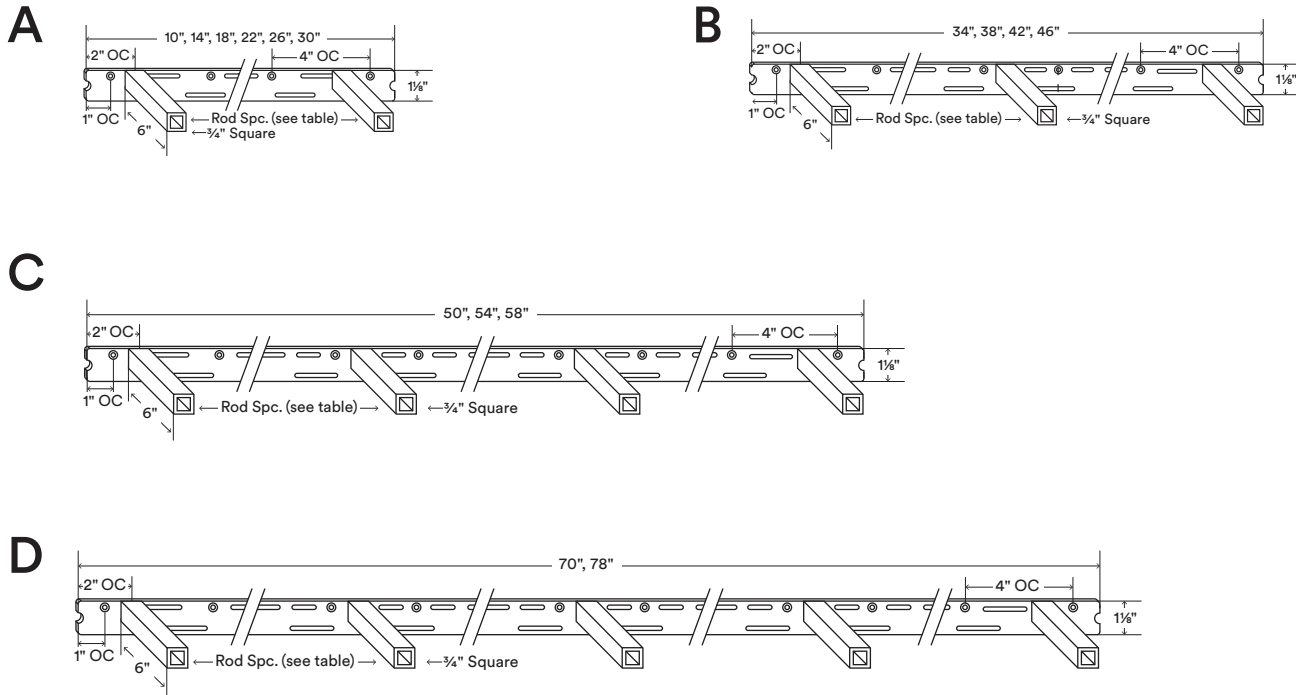

About Aksel Hollow Core MD

Back bar is 3/4" thick, hot-rolled steel.

Fastener holes are set 1" OC from each end and continue 4" OC down the length of the bracket.

Countersunk fastener holes are 3/8" outside diameter (OD).

Rods are inset 2" on center (OC) from left and right bar end.

Rods are 6" from backbar face.

Custom rod lengths available upon request.

Supports up to 85 lbs. per hollow rod when correctly mounted*

Manufactured from top-quality American steel made with 70% recycled content.

Designed & engineered in the U.S. of Awesome.

Shelfology radically recycles all production metal, wood and cardboard waste

***WARNING:** All brackets must be installed into studs or posts. Failure to do so may result in saggy shelves, falling objects, or even injury.

****Drawings are representations only and not to scale.**

© Shelfology 2025

| Figure | Rod Count | Load | Back bar Length | Rod Spc (OC) | Shelf Length | Shelf Depth | Shelf Thickness |
|--------|-----------|---------|-----------------|--------------|--------------|-------------|-----------------|
| A | 2 | 170 lbs | 10" | 6" | 12"–16" | 7"–14" | 3/4"–3" |
| A | 2 | 170 lbs | 14" | 10" | 16"–20" | 7"–14" | 3/4"–3" |
| A | 2 | 170 lbs | 18" | 14" | 20"–24" | 7"–14" | 3/4"–3" |
| A | 2 | 170 lbs | 22" | 18" | 24"–28" | 7"–14" | 3/4"–3" |
| A | 2 | 170 lbs | 26" | 22" | 28"–32" | 7"–14" | 3/4"–3" |
| A | 2 | 170 lbs | 30" | 26" | 32"–36" | 7"–14" | 3/4"–3" |
| B | 3 | 255 lbs | 34" | 15" | 36"–40" | 7"–14" | 3/4"–3" |
| B | 3 | 255 lbs | 38" | 17" | 40"–44" | 7"–14" | 3/4"–3" |
| B | 3 | 255 lbs | 42" | 19" | 44"–48" | 7"–14" | 3/4"–3" |
| B | 3 | 255 lbs | 46" | 21" | 48"–52" | 7"–14" | 3/4"–3" |
| C | 4 | 340 lbs | 50" | 15" | 52"–56" | 7"–14" | 3/4"–3" |
| C | 4 | 340 lbs | 54" | 16" | 56"–60" | 7"–14" | 3/4"–3" |
| C | 4 | 340 lbs | 58" | 18" | 60"–72" | 7"–14" | 3/4"–3" |
| D | 5 | 425 lbs | 70" | 16 1/2" | 72"–80" | 7"–14" | 3/4"–3" |
| D | 5 | 425 lbs | 78" | 18 1/2" | 80"–96" | 7"–14" | 3/4"–3" |

