


# Bart

Load Capacity (lbs)  
**30-100**

Shelf Depth Range (in)  
**6-12**

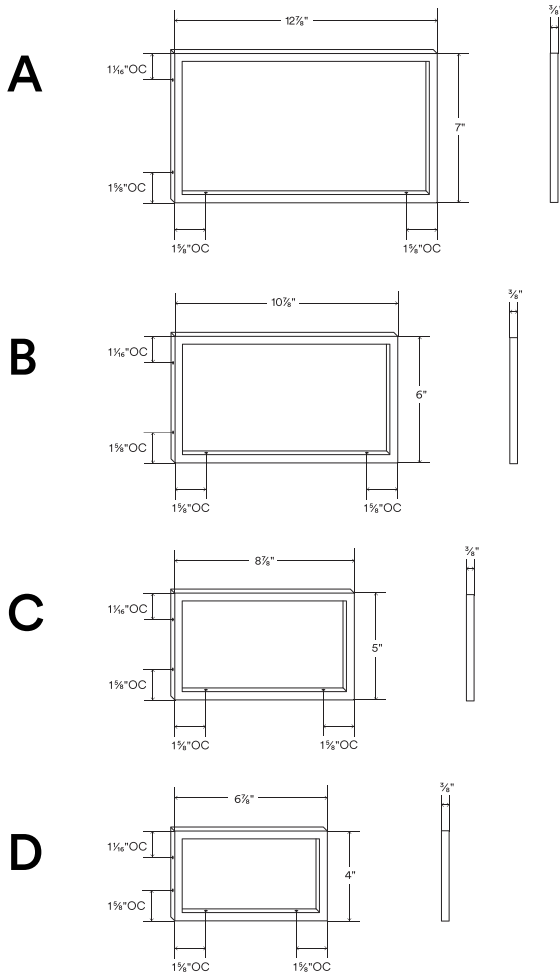

## About Bart

Bar is 3/8" thick solid hot-rolled steel.

Screw holes are 3/16" outside diameter (OD). First wall mounting screw hole is 1 1/8" OC from the top of the bracket. Second wall mounting screw hole is 1 1/8" OC from the bottom of the bracket.

Includes two set screw holes to secure the shelf to the bracket located 1 1/8" from the front and back edge of bracket.

Maximum bracket spacing is 48" or less for all installations.

Manufactured from top-quality American steel made with 70% recycled content.

Designed and produced in beautiful middle-of-nowhere Idaho, with sweat, tears, and Ameri-quality awesomeness.

Shelfology radically recycles all production metal, wood and cardboard waste.

**\*\*WARNING:** All brackets must be installed into studs or posts. Failure to do so may result in saggy brackets, falling objects, or even injury.

**\*\*\*Drawings are representations only and not to scale.**

© Shelfology 2022

| Figure | Shelf Count | Shelf Length | Shelf Depth | Shelf Thickness | Bracket Weight | Load    |
|--------|-------------|--------------|-------------|-----------------|----------------|---------|
| A      | 1           | 12"-84"      | 12"         | 3/8"            | 1.5 lbs        | 30 lbs  |
| B      | 1           | 12"-84"      | 10"         | 3/8"            | 1.26 lbs       | 40 lbs  |
| C      | 1           | 12"-84"      | 8"          | 3/8"            | 1.02 lbs       | 65 lbs  |
| D      | 1           | 12"-84"      | 6"          | 3/8"            | 0.79 lbs       | 100 lbs |